




No.	SIZE OF CONN.	PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M3/H
-----	---------------	---------	---------	------------------	---------------------------------------

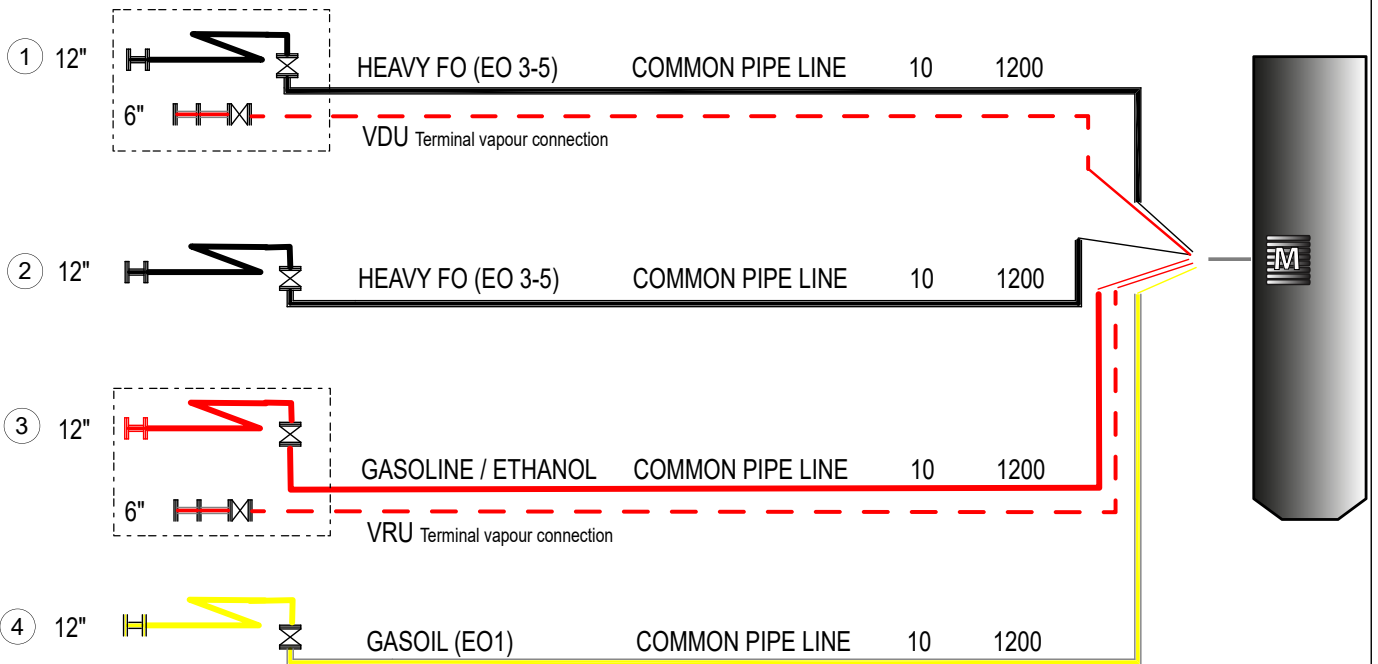

Hard arm connections: 8", 10", 12" with 150 lbs  
Hose connections: ≤ 6"

If two **adjacent hardarms** are to be used, the distance between the ship's manifolds should be 3,5 m.

Bunkers available by barge  
Fresh water available  
Maximum 2 hoses to be used per ship/shore connection

- ① = Hard arm No.
- = Hard arm symbol
- = Hose symbol

	 N	BERTH DIRECTION 033° / 213°	<b>MANIFOLD ARRANGEMENT SKARVIK BERTH 510</b>				BERTH / DRAWING NO BERTH510	APPROVED BY CL
			REV. DATE / DATE 2021-06-10	DRAWN MAFLOBE	SCALE /			

